
WF-9500 MBA Series Replacements for 40/60/80 Amp Power Centers



THE HEARTBEAT OF TODAY'S RVS

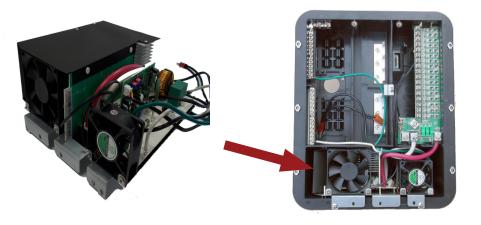

Easy Installation

With 40 years of power equipment experience, WFCO knows what is important to our customers. High on the list is easy, fast installation. Our WF-9500-MBA Series is a quick, easy replacement part for all power centers. It installs easily with only two screws, three AC wires, and two DC wires. With no need to re-wire, installation is only 10 minutes! Customers also have the option for Reverse Polarity Detection that meets new RVIA & NEC requirements with an audible alarm notification. No additional wiring or hookup required and accepts hi-pot testing.

SMART ENGINEERING: THREE-STAGE CHARGING IS BETTER

WFCO's automatic three-stage converter handles every charging need for the RV while extending the battery's life. Well-maintained batteries should never need more than two-stage (Normal and Trickle) charging. Our third stage (Bulk) is provided for the rare times a battery needs extra-power for charging. See wfcoelectronics.com for details.



PRODUCT FEATURES

SPECIFICATIONS	WF-9540-MBA	WF-9560-MBA	WF-9580-MBA
Power Input	685W	1030W	1370W
Input Voltage	105-130 VAC/60 Hz	105-130 VAC/60 Hz	105-130 VAC/60 Hz
Output Current	40A	60A	80A
Converter Type	3 Stage Converter Charger		
Voltage Output	13.2 - 14.4 VDC		
Normal mode	13.6 VDC		
Trickle charge mode	13.2 VDC		
Bulk charge mode	14.4 VDC		
Dimensions	7 1/16"W x 3 7/8"H x 9 1/2"D		
Weight	4 lbs.	5 lbs.	5 lbs.

Certifications: UL^{*} and cUL^{*} listed and FCC Class B compliant. Specifications are subject to change without notice or obligation. ALL MODELS: Standard Safety Features/Protections: Over Current, Over Temperature, Over Voltage, Reverse Polarity



THE **HEARTBEAT** OF TODAY'S RVS 2021 Aeroplex Drive North · Elkhart, IN 46514 P- 877.294.8997 · F- 574.294.8698 wfcoelectronics.com AD-BSC-0014-0 © 2016 WFCO Electronics Printed in USA 07/16 The RVOur Power Pros provide expertIndustry'stechnical support for everythingElectricalthe RV industry needs. VisitAuthoritywfcoelectronics.com/support.



Model WF-9540-MBA Output: 40 Amps DC Input: 105-130 VAC, 60 Hz, 685W

Model WF-9560-MBA Output: 60 Amps DC Input: 105-130 VAC, 60 Hz, 1030W

Model WF-9580-MBA Output: 80 Amps DC Input: 105-130 VAC, 60 Hz, 1370W