



Power Choices that Fit EVERYWHERE

- Model WF-9835 - Output: 35 Amps DC - Input: 105-130 VAC, 60 Hz, 600W
- Model WF-9845 - Output: 45 Amps DC - Input: 105-130 VAC, 60 Hz, 770W
- Model WF-9855 - Output: 55 Amps DC - Input: 105-130 VAC, 60 Hz, 940W
- Model WF-9865 - Output: 65 Amps DC - Input: 105-130 VAC, 60 Hz, 1110W
- Model WF-9875 - Output: 75 Amps DC - Input: 105-130 VAC, 60 Hz, 1280W

Reliability. Vertically integrated, WFCO has total supply chain control, ensuring quality materials, parts, and processes at each stage. Components are quality tested at critical manufacturing stages resulting in zero faults at the final 4-hour burn-in test, helping keep warranty claims below 1%. All models are UL® and cUL® listed and FCC Class B compliant.

The WF-9800 Series meets your needs for clean DC power ranging from 35 to 75 Amps. With versatility like this, it's ideal for use in a wide array of recreational vehicles.

Built on 40 years of power equipment experience, the WF-9800 Series converters are equipped with an advanced 3-stage charger. This unique power source solution is designed to provide clean power wherever and whenever it's needed.

PRODUCT FEATURES



A Battery Selector toggle switch provides customers with the choice of using either an AGM/Lead Acid or a Gel-Cell type battery.



WFCO Electronics is the leader in manufacturing, distribution, and servicing of power conversion products in the RV industry, preferred more than 4-to-1 by RV manufacturers.




WF-9800 converters are available in more size and power choices than other brands. Manufacturers can more closely match the exact needs of every RV, saving space and cost.




SMART ENGINEERING: THREE-STAGE CHARGING IS BETTER.

WFCO's automatic three-stage converter handles every charging need for the RV while extending the battery's life. Well-maintained batteries should never need more than two-stage (Normal and Trickle) charging. Our third stage (Bulk) is provided for the rare times a battery needs extra-power for charging. See wfcoelectronics.com for details.

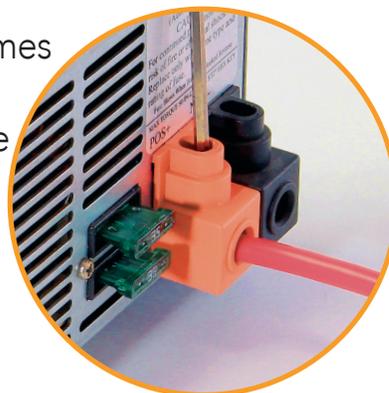

EASY INSTALLATION

All WFCO models are designed with the installer and assembly line in mind. We work with installers every day to find ways to streamline installation to reduce time and fiddle factor.

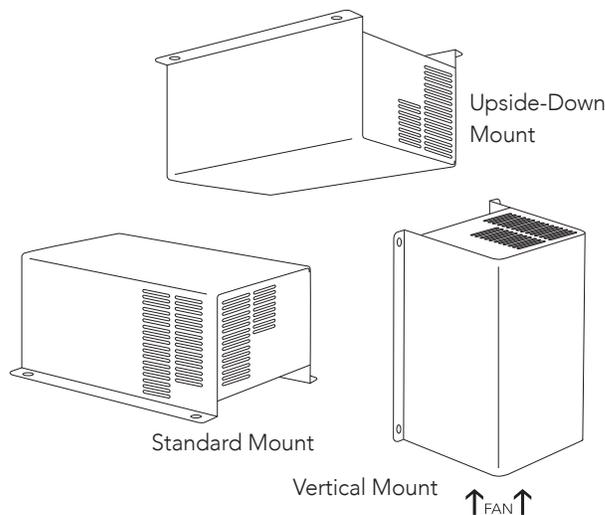

This versatile deck mount converter can be installed in any position, making RV design more flexible for manufacturers.

Mount the converter vertically with the fan at the bottom to enhance cooling. WF-9800 Series converter features easy horizontal installation and can even be installed upside down.

Fully insulated DC connections are made for protection with an open-top design for ease of use for fast and nearly effortless installation.

SPECIFICATIONS	WF-9835-AD	WF-9845-AD	WF-9855-AD	WF-9865-AD	WF-9875-AD
Power Input	600W	770W	940W	1110W	1280W
Input Voltage	105 VAC - 130 VAC / 60 Hz				
Output Current LA/LI	35A / 32.5A	45A / 44.5A	55A / 50A	65A / 60A	75A / 70A
Converter Type (LA/LI)	3 Stage Converter Charger / 2 Stage Converter Charger				
Voltage Output (LA/LI)	13.2 - 14.4 VDC / 13.6 - 14.6 VDC				
Normal mode	13.6 VDC				
Trickle charge mode (LA Only)	13.2 VDC				
Bulk charge mode (LA/LI)	14.4 VDC / 14.6 VDC				
Outer Dimensions	4 5/8"W x 4"H x 7 1/2"D	4 3/4"W x 4"H x 8 3/4"D		5 1/8"W x 4"H x 10 1/4"D	
Weight	4 lbs.	5.25 lbs.	5.5 lbs.	6.25 lbs.	6.75 lbs.

Certifications: UL® and cUL® listed and FCC Class B compliant. Specifications are subject to change without notice or obligation.
 ALL MODELS: Standard Safety Features/Protections: Over Current, Over Temperature, Over Voltage, Reverse Polarity
 Installation: Case Material: Metal, Color: Gray



EXPERT PRODUCT SUPPORT
 Our Power Pros provide expert technical support for everything the RV industry needs.
 Visit wfcoelectronics.com/support.