



# POWER

## That Fits - Across the Globe

Model WF-98855E - Output: 55 Amps DC - Input: 190-260 VAC, 50/60 Hz, 950W



DESIGNED FOR  
RV EXPORTS



WFCO Electronics is the leader in manufacturing, distribution, and servicing of power conversion products in the RV industry, preferred more than 4-to-1 by RV manufacturers.

**Reliability.** Vertically integrated, WFCO has total supply chain control, ensuring quality materials, parts and processes at each stage. Components are quality tested at critical manufacturing stages resulting in zero faults at the final 4-hour burn-in test, helping keep warranty claims below 1%. All models are FCC Class B compliant.

The WF-8800 Series is designed specifically for manufacturers that export RVs, meeting your needs for amps as well as power requirements ranging from 190 to 260 volts and 50 or 60 Hz. This world-traveling converter charger is ideal for use in a wide array of recreational vehicles.

Built on years of RV power equipment experience, the WF-8800 Series converters are made with an advanced 3-stage charger. This unique power source solution is designed to provide clean power wherever it's needed.

### PRODUCT FEATURES

These WFCO exclusives provide more safety and diagnostic information to technicians and RV owners.



Quiet operation is assured as the cooling fan runs only when needed.




Electronic current limiting automatically shuts down the power during overload or short-circuit conditions.



## SMART ENGINEERING: THREE-STAGE CHARGING IS BETTER.


WFCO's automatic three-stage converter handles every charging need for the RV while extending the battery's life. Well-maintained batteries should never need more than two-stage (Normal and Trickle) charging. Our third stage (Bulk) is provided for the rare times a battery needs extra-power for charging. See [wfcoelectronics.com](http://wfcoelectronics.com) for details.

Fully insulated quick connections are made for protection with an open-top design for ease of use for fast and nearly effortless installation.



## EASY INSTALLATION

All WFCO models are designed with the installer and assembly line in mind. We work with installers every day to find ways to streamline installation to reduce time and fiddle factor.

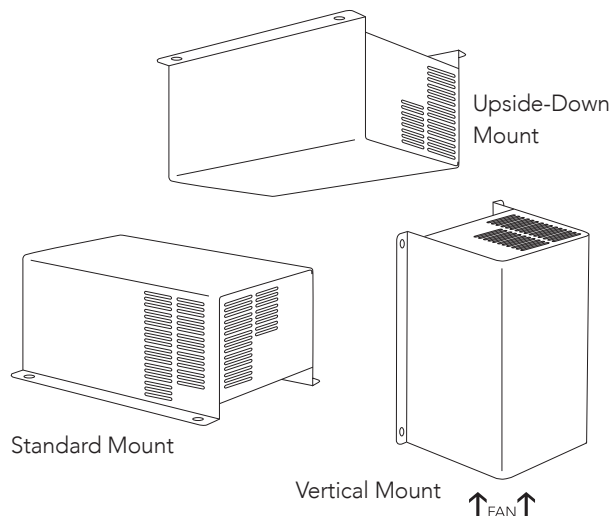

This versatile deck mount converter can be installed in any position, making RV design more flexible for manufacturers. Mount converter vertically with fan at the bottom to enhance cooling. WF-8800 Series converter features easy horizontal installation and can even be installed upside down.

SPECIFICATIONS	WF-8855E
Power Input	950W
Input Voltage	190-260 VAC, 50 / 60Hz
Output Current	55A
Converter Type	3 Stage Converter Charger
Voltage Output	13.2 - 14.4 VDC
Normal mode	13.6 VDC
Trickle charge mode	13.2 VDC
Bulk charge mode	14.4 VDC
Outer Dimensions	5 7/8" W x 4" H x 9 5/8" D
Weight	5.25 lbs.

Certifications: UL® and cUL® listed and FCC Class B compliant. Specifications are subject to change without notice or obligation.

### ALL MODELS

Standard Safety

### FEATURES/PROTECTIONS

Over Current, Over Temperature, Over Voltage, Reverse Polarity

### CASE MATERIAL

Metal

### COLORS

Gray



EXPERT PRODUCT SUPPORT

Our Power Pros provide expert technical support for everything the RV industry needs. Visit [wfcoelectronics.com/support](http://wfcoelectronics.com/support).